FA1: ☑ Fingerprint ☑ Facial ☑ Password

FA2: ☑ Card ☑ Facial ☑ Password

FA1

FA2

WWW.HAN.COM.TW

Specification	FA1 / FA2	
LCD Display	4.3"TFT Touch Screen	
Speaker	Voice prompt (language can be selected)	
Processor	Multi-Bio 600	
Camera	High Definition Infrared Camera	
Memory	256M flash, 64 SDRAM	
Identification	Face: 700 Fingerprint: 5,000 Logs: 100,000	Face: 700 Card: 10,000 Logs: 100,000

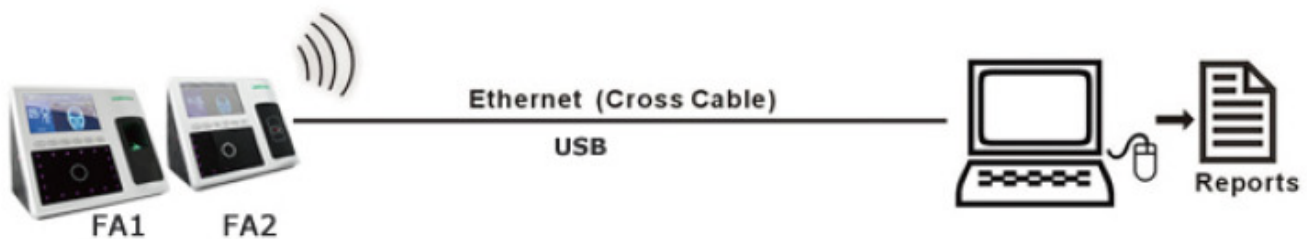|		
Verification	Verification speed≤2s	
Attendance status	TCP/IP, RS232/485, USB Host/Client, Wiegand in/out, optional (Wi-Fi, GPRS)	
Access control	Built-in relay, Door Sensor, Wiegand out	
Alarm	Dismantlement alarm, break-in alarm, duress alarm	
Language	Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected	
Environment	Operation temperature: 0℃ ~ 45℃ Operation humidity: 20% ~ 80%	
Power Supply	110/220 VAC ~ 12VDC 3A	
Machine size	194(L)* 165(W)* 86(H) mm	
Function support	Schedule bell, DLST, Self inquiry, Workcode, SMS, T9 input, Webserver, Day-light-saving,	Schedule bell, T9 input, Webserver, Photo ID, Day-light-saving, Workcode, SMS
*Customize Function	Wi-Fi, GPRS, Printer support, Built-in back up battery, Mifare/HID/iClass reader	Wi-Fi, GPRS, Printer support, Modem, 14 Digits Code, POE, Soap, Built-in back up battery, Mifare/HID/iClass reader

6 touchable user-defined function keys

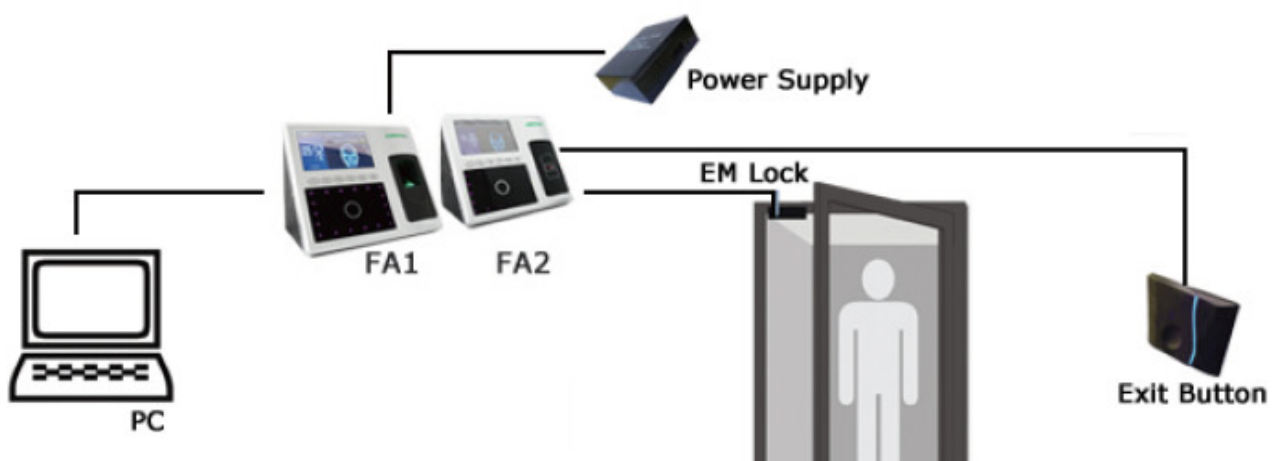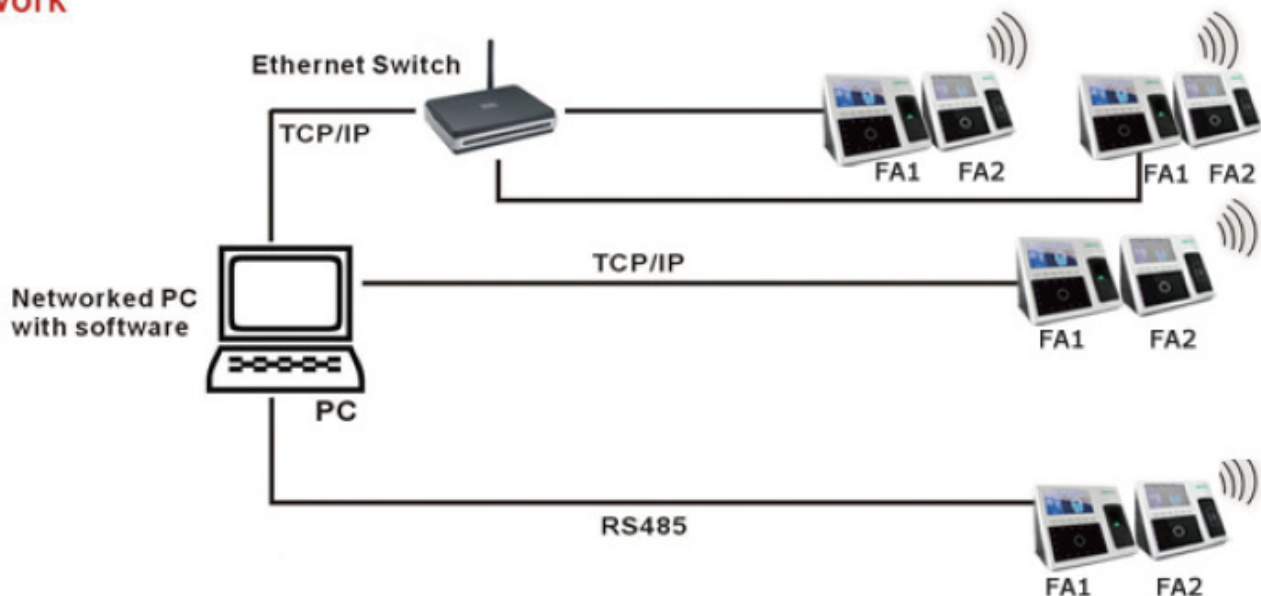## Features:

▶ Support Fingerprint(FA1), Card(FA2), Facial and Password identification method
▶ 4.3"TFT touch screen, elegant design, fashionable and simple interface
▶ 6 user-defined function keys, easy operation
▶ Infrared optical system enables user identification in dark environment
▶ Composite algorithm system providing highest operating speed
▶ Optional built in backup battery support extra 4 hours continuous operation if power failure
▶ Built-in wireless WIFI or GPRS communication for option

Standalone

FA1   FA2   Ethernet (Cross Cable)   USB   Reports

Network

Ethernet Switch
TCP/IP
FA1 FA2   FA1 FA2
Networked PC with software
TCP/IP
FA1   FA2
PC
RS485
FA1   FA2

Power Supply
FA1   FA2   EM Lock
PC   Exit Button